

# G-6854-LM47N



### Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 7-13/16" spout reach
- 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve G-1060





#### **Product Features**

- Floor-mount installation
- Aerated spout flow rate ~8 gpm
   @ 45 psi
- Aerated handshower flow rate
   <1.8 max gpm</li>
- 7-13/16" spout reach
- 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose

### **Optional Accessories**

 Optional in-line pressure balancing valve G-1060


### Available Finishes

- Polished Chrome G-6854-LM47N-PC
- Brushed Nickel
   G-6854-LM47N-BNi
- Polished Nickel
   G-6854-LM47N-PN
- Olive Bronze<sup>™</sup> G-6854-LM47N-OB

#### Warranty

Limited lifetime warranty

For complete warranty information go to: www.graff-faucets.com/en/info/faqs

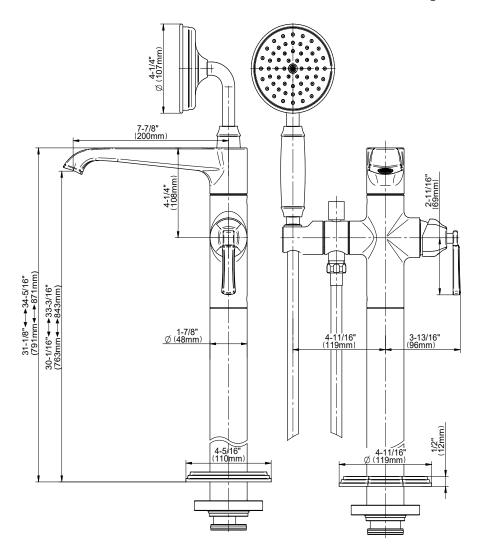





### **Finishes**



24K Gold





24K Brushed Brushed Brass Architectural Gold





PVD



Matte Black Olive Bronze Onyx PVD® Polished Brass



Black™



PVD



Brushed Nickel



Polished Chrome



Brushed Onyx



Polished Nickel



Brushed OR'osa PVD®



 $\mathsf{OR'osa}\;\mathsf{PVD} \\ \mathbb{8}$ 



Gunmetal



Unfinished **Brass** 



Unfinished



Vintage Brushed BrassBrushed Brass



Architectural White






### Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

### Warranty

• Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

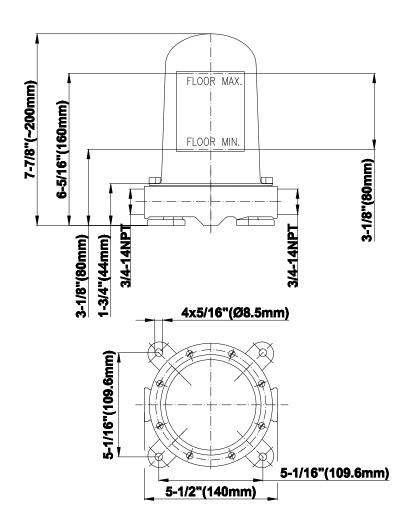



# G-6854-LM47N



# Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 7-13/16" spout reach
- 34-5/16" approximate height

Vintage

• Includes handshower with 59" spiral flexible hose

Architectural

• Optional in-line pressure balancing valve G-1060

#### **Finishes**

Unfinished



Brushed BrassBrushed Brass

White





### **Product Features**

- Floor-mount installation
- Aerated spout flow rate ~8 gpm
  @ 45 psi
- Aerated handshower flow rate
   1.8 max gpm
- 7-13/16" spout reach
- 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose

### Optional Accessories

 Optional in-line pressure balancing valve G-1060

### Available Finishes

- Polished Chrome
   G-6854-LM47N-PC
- Brushed Nickel
   G-6854-LM47N-BNi
- Polished Nickel
   G-6854-LM47N-PN
- Olive Bronze<sup>™</sup> G-6854-LM47N-OB

### <u>Warranty</u>

• Limited lifetime warranty

For complete warranty information go to: www.graff-faucets.com/en/info/faqs

