MODEL SPIN DCS

Single Hole Three-Way Stainless Steel Kitchen Faucet for Mains and Filtered Water with Side Spray

SP-VS-KFC-SP

SP-VS-KFC-SP-SSMStainless Steel MatteSP-VS-KFC-SP-SSPStainless Steel PolishedSP-VS-KFC-SP-SSMBStainless Steel Matte Black PVDSP-VS-KFC-SP-SSMGStainless Steel Matte Gold PVDSP-VS-KFC-SP-SSMRGStainless Steel Matte Rose Gold PVD*SP-VS-KFC-SP-SSMTStainless Steel Matte Titanium PVD*




- Maximum counter thickness: 2-7/16"
- Minimum install hole diameter: 1-3/8"
- Braided stainless steel flexible hoses 3/8" compression
- Flow rate: 1.75 GPM at 45 PSI in conformity with CalGreen and WaterSense requirements.
 Filtered water flow rate is 1.5 GPM.
- The levers rotate 90°
- · The spout rotates 360°
- · The left handle controls filtered water
- · The right handle controls the main water
- \cdot Cold water flow positioned towards front for child safety
- \cdot The comfortable side spray is ideal for rinsing vegetables, dishes etc.
- EasyClean spray face
- Counterweight ensures smooth gliding hose
- Spout-in-spout system with a dedicated waterway for filtered water
- · Can be connected to a water chiller through the cold water line
- · Fully recyclable
- $\cdot~$ 100% lead free the ideal choice for your drinking water
- · Areas of application: Indoor & outdoor

COMPATIBLE WITH (not supplied)

 $\cdot \quad \mathsf{MT6K\text{-}HF} \, \mathsf{Mountain} \, \mathsf{Plumbing} \, \mathsf{water} \, \mathsf{filter} \\$

$\textbf{REQUIRED MGS CONNECTION KIT} \ (\textbf{supplied})$

 SV9RAC.322 Connection kit for MT1250XL Mountain Plumbing filter

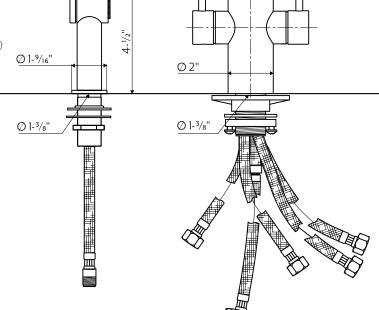



Available by special order only.
Please allow 14-16 weeks lead-time.

393 Fortune Blvd, Milford, MA 01757 USA 1 844 992 8371

9-1/8'

18-1/4"